



P-2000 Electropneumatic positioner

Product
Information





P-2000 Electropneumatic positioner

Description

The PMV P-2000 series positioner is one of the sturdiest, reliable two-stage electropneumatic positioners on the market.

Controlling air delivery with the PMV gold plated spool valve assembly and receiving the 4-20 mA control signal through our voice coil magnet unit assembly, this positioner offers a wide range of features and benefits.

P-2000 has an internal gain adjustment, as with other PMV models, the easy to reach span and zero adjustment makes this model very simple to calibrate.

Features and Benefit

- Rugged design for harsh industrial environments.
- Simple, easy to calibrate.
- Low air consumption.
- High air delivery capacity.
- Internal gain adjustment.
- Bright, visible indicator.
- Mounting kits for a variety of actuators-rotary and linear.
- Split range cam standard.
- Can reverse action simply and quickly.
- Positive internal pressure.
- Variety of spindles and characterized cams.
- Easy to add on position feedback, F5.



P2000 with F5 feedback unit for limit switches and 4-20 mA feedback.



Technical Data

Input signal	0-20/ 4-20 mA 2wire
Air supply	2-8 bar (30-120 Psi) Oil free, dry air filtered to 25 micron
Air Connections	1/4" G or NPT
Electrical connection	PG 13,5 or 1/2" NPT
Terminals	4 mm ² (AWG 11) screw terminals
Linearity %*	±0,5
Repeatability %*	0,5
Hysteresis + deadband %*	1
Gain factor	Adjustable 3 to 26 %/ % ISA 75.13-1989 Adjustable 50-400 kPa/ kPa at 20% load
Air delivery capacity	340 nl/min (12 SCFM) at 0,6 Mpa/ 87 Psi
Air consumption	10 nl/ min (0,35 SCFM) at 0,6 Mpa/ 87 Psi
Supply pressure effect	0,75%/ 100 kPa (15 Psi)
Position sensitivity	0,25% of span
EMC	89/ 336/ EEC & 92/ 31/EEC
Internal resistance	Max 240 Ω
Temp range	-15°C to 85°C (5°F to 185°F)
Materials, surface treatment	Aluminium anodized, stainless steel
Fasteners	Zincified steel
Ingress protection	IP54/ NEMA 3R
Weight	2,7 kg/ lbs 5,4





* % of full scale

P2000 Series Coding

- 1. Model**
P2000 or P2020 Standard or High air delivery capacity
- 2. Air connections**
N or G NPT 1/4" air 1/2" NPT El. or G 1/4" air PG 13,5 El.
- 3. Surface treatment**
E Anodised, black
- 4. Spindle**
01, 23 etc C1 to C37. See dwg SPNDLS_2000
- 5. Cam**
F01, F20 etc F01 to F51, F01=linear 90 deg, standard
- 6. Front cover**
PV9DA 90 deg, Direct, arrow indicator
- 7. Temperature/gain**
ZN Nitrile seals -15deg °C/Normal gain springs

Example: P2000NE-23F01-PV9DA-ZN

1 23 4 5 6 7

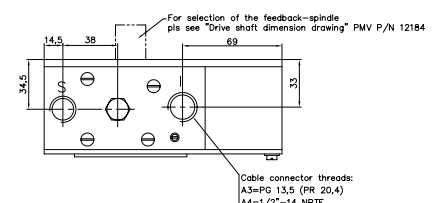



p/n: FCD PMENBR0012-02



Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation and Maintenance (I & M) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2007 Flowserve Corporation, Irving, Texas, USA. Flowserve and PMV are registered trademarks of Flowserve Corporation.

Palmstierna International AB
Korta Gatan 9
SE-171 54 Solna
SWEDEN
Tel: +46 (0) 8 555 106 00
Fax: +46 (0) 8 555 106 01
E-mail: infopmv@flowserve.com

Germany
Flowserve
Sperberweg 16
D-41468 Neuss
GERMANY
Tel: +49 (0) 2131 795 74 80
Fax: +49 (0) 2131 795 74 99
E-mail: pmvgermany@flowserve.com

UK
Flowserve
Abex Road
Newbury, Berkshire, RG14 5EY
UK
Tel: +44 (0) 1635 46 999
Fax: +44 (0) 1635 36 034
E-mail: pmvukinfo@flowserve.com

Italy
Flowserve Spa
Via Prealpi, 30
20032 Cormano (Milano)
ITALY
Tel: +39 (0) 2 663 251
Fax: +39 (0) 2 615 18 63
E-mail: infoitaly@flowserve.com

USA, Mexico
PMV-USA
1440 Lake Front Circle, Unit 160
The Woodlands, TX 77380
USA
Tel: +1 281 292 7500
Fax: +1 281 292 7760
E-mail: pmvusa@flowserve.com

Canada
Cancoppas Limited
2595 Dunwin Drive, Unit 2
Mississauga, Ont L5L 3N9
CANADA
Tel: +1 905 569 6246
Fax: +1 905 569 6244
E-mail: controls@cancoppas.com

Asia Pacific Headquarters
Flowserve Pte Ltd.
No. 12 Tuas Avenue 20
REPUBLIC OF SINGAPORE 638824
Tel: +65 (0) 687 98900
Fax: +65 (0) 686 24940

South Africa
Flowserve
Unit 1, 12 Director Road
Spartan Ext. 2
1613 Kempton Park, Gauteng
SOUTH AFRICA
Tel: +27 (0) 11 397 3150
Fax: +27 (0) 11 397 5300

The Netherlands
Fabromatic BV
Rechtzaad 17
4703 RC Roosendaal
THE NETHERLANDS
Tel: +31 (0) 30 6771946
Fax: +27 (0) 30 6772471
E-mail: fcbinfo@flowserve.com

China
Flowserve
Hanwei Building
No. 7 Guanghua Road
Chao Yang District
100004 Beijing
CHINA
Tel: +86 (10) 6561 1900
Fax: +86 (10) 6561 1899

www.pmvnu